



®

DHA®

QJ/DHA 01.160-2019

LD33039

Closed Loop Brushless Motor Adapter IC

Description

The LD33039 is a high performance closed-loop speed control adapter specifically designed for use in brushless DC motor control systems. Implementation will allow precise speed regulation without the need for a magnetic or optical tachometer. This device contains three input buffers each with hysteresis for noise immunity, three digital edge detectors, a programmable monostable, and an internal shunt regulator. Also included is an inverter output for use in systems that require conversion of sensor phasing. Although this device is primarily intended for use with the LD33035 brushless motor controller, it can be used cost effectively in many other closed-loop speed control applications.

Features

- Digital Detection of Each Input Transition for Improved Low Speed Motor Operation
- TTL Compatible Inputs With Hysteresis
- Operation Down to 5.5 V for Direct Powering from LD33035 Reference
- Internal Shunt Regulator Allows Operation from a Non-Regulated Voltage Source
- Inverter Output for Easy Conversion between 60° /300° and 120° /240° Sensor Phasing


Conventions

- Pb-Free Packages are Available


Ordering Information

Package	Remarks
SOP8	Tubed, Reeled, Pb-free
DIP8	Tubed, Pb-free

Block Diagram

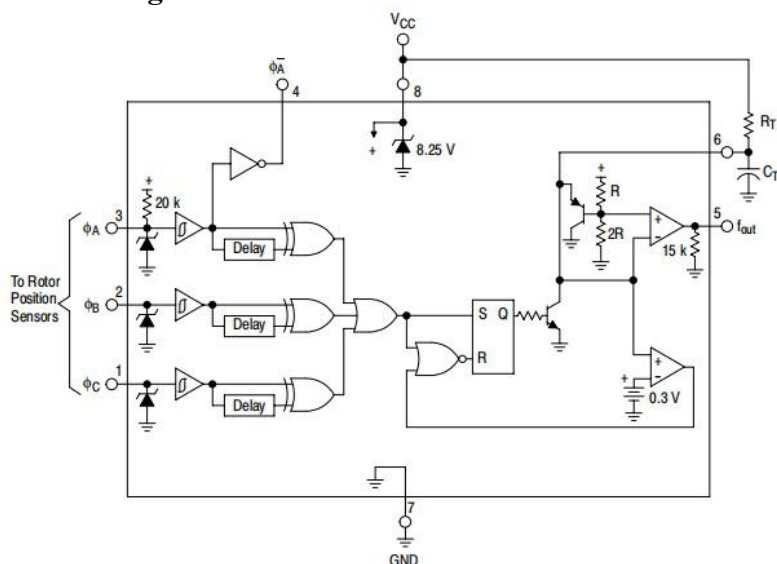

Pin Description

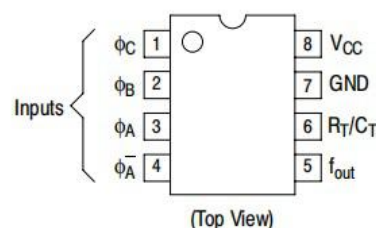



®

DHA®

QJ/DHA 01.160-2019

LD33039

Absolute Maximum Ratings

Parameters	Symbol	Value	Unit
V _{CC} Zener Current	I _Z (V _{CC})	30	mA
Logic Input Current (Pins 1, 2, 3)	I _{IH}	5.0	mA
Output Current (Pins 4, 5), Sink or Source	I _{DRV}	20	mA
Power Dissipation and Thermal Characteristics			
Maximum Power Dissipation @ T _A = + 85° C	PD	650	mW
Thermal Resistance, Junction-to-Air	R _{θJA}	100	° C/W
Operating Junction Temperature	T _J	150	°C
Operating Ambient Temperature Range	T _A	-40 to +125	°C
Storage Temperature Range	T _{stg}	-65 to +150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Electrical Characteristics

(V_{CC} = 6.25 V, R_T = 10k, C_T = 22 nF, T_A = 25° C, unless otherwise noted)

Parameters	Symbol	Min	Typ	Max	Unit
LOGIC INPUTS					
Input Threshold Voltage					
High State	V _{IH}	2.4	2.1	-	V
Low State	V _{IL}	-	1.4	1.0	
Hysteresis	V _H	0.4	0.7	0.9	
Input Current					
High State (V _{IH} = 5.0 V)	I _{IH}	-40	-60	-80	μA
φ A		-	-0.3	-5.0	
φ B, φ C		-	-0.3	-5.0	
Low State (V _{IL} = 0 V)	I _{IL}	-190	-300	-380	
φ A		-	-0.3	-5.0	
φ B, φ C		-	-0.3	-5.0	



®

DHA®

QJ/DHA 01.160-2019

LD33039

Parameters	Symbol	Min	Typ	Max	Unit
MONOSTABLE AND OUTPUT SECTIONS					
Output Voltage High State $F_{out} (I_{source} = 5.0mA)$ $\phi_{\bar{A}} (I_{source} = 2.0mA)$ Low State $F_{out} (I_{sink} = 10mA)$ $\phi_{\bar{A}} (I_{sink} = 10mA)$	V_{OH} V_{OL}	3.60 4.20 - -	3.95 4.75 0.25 0.25	4.20 - 0.50 0.50	V
Capacitor C_T Discharge Current	I_{dischg}	20	35	60	mA
Output Pulse Width (Pin 5)	t_{pw}	205	225	245	μs
POWER SUPPLY SECTION					
Power Supply Operating Voltage Range ($T_A = -40^\circ$ to $+85^\circ C$)	V_{CC}	5.5	-	V_Z	V
Power Supply Current	I_{CC}	1.8	3.9	5.0	mA
Zener Voltage ($I_Z = 10mA$)	V_Z	7.5	8.25	9.0	V
Zener Dynamic Impedance ($\Delta I_Z = 10 mA$ to $20 mA$, $f \leq 1.0 kHz$)	$ Z_{ka} $	-	2.0	5.0	Ω



®

DHA®

QJ/DHA 01.160-2019

LD33039

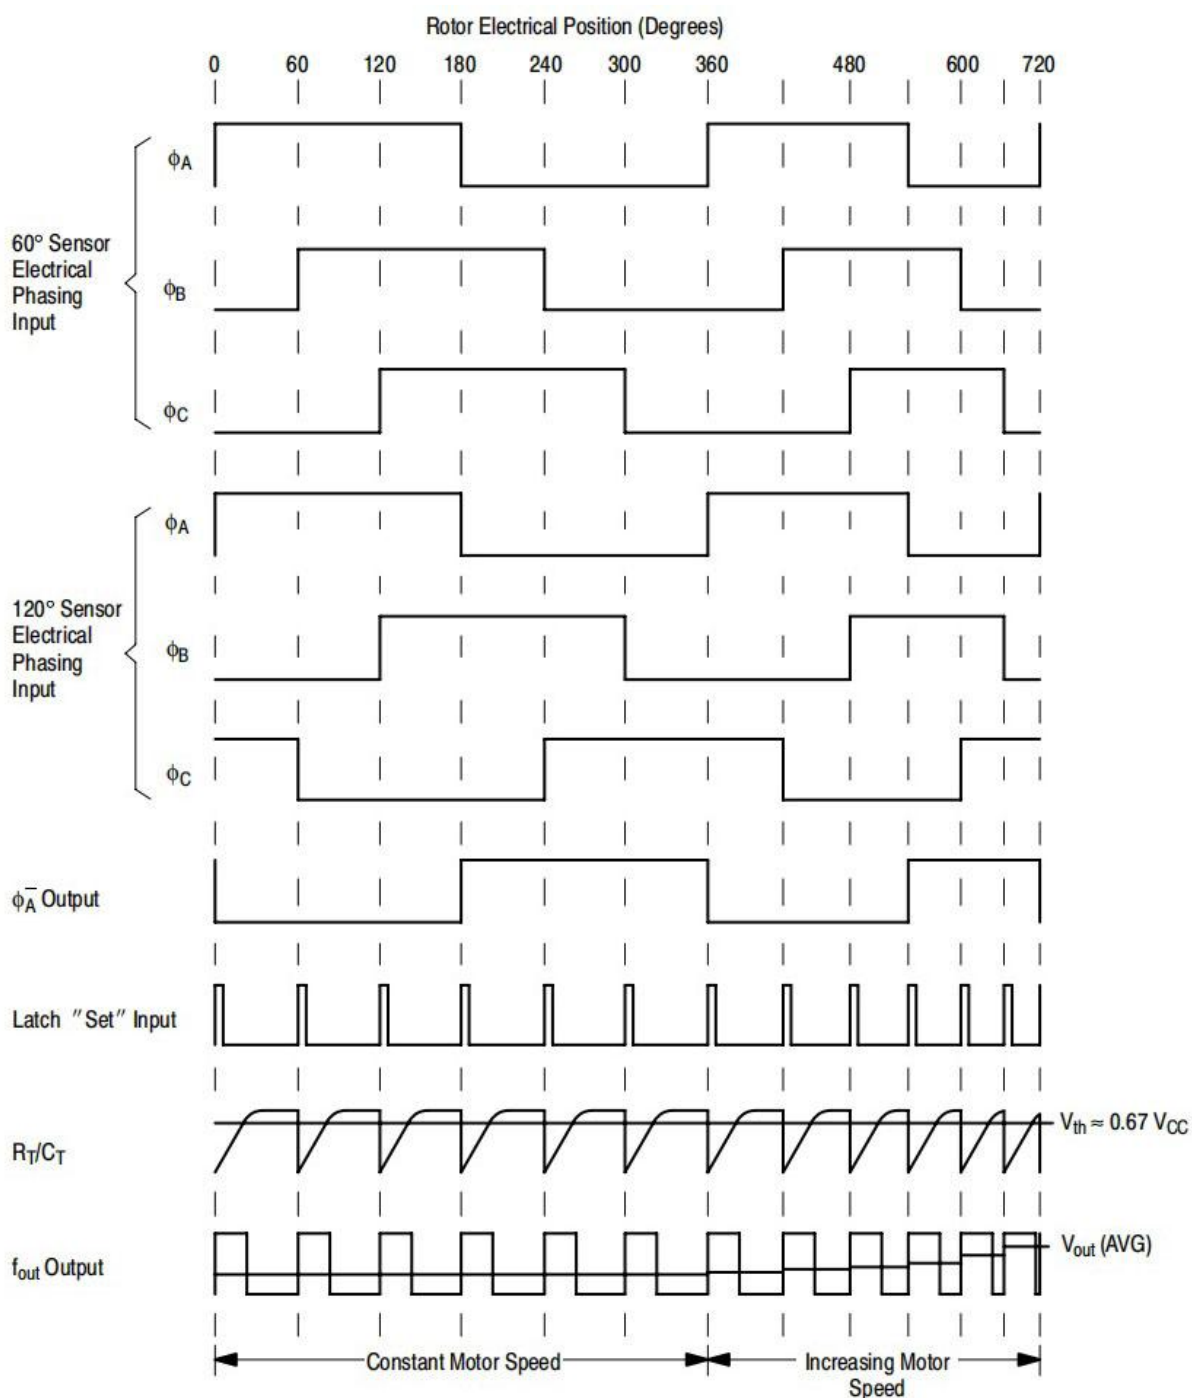


Figure 1. Typical Three Phase, Six Step Motor Application



®

DHA®

QJ/DHA 01.160-2019

LD33039

OPERATING DESCRIPTION

The LD33039 provides an economical method of implementing closed-loop speed control of brushless DC motors by eliminating the need for a magnetic or optical tachometer. Shown in the timing diagram of Figure 1, the three inputs (Pins 1, 2, 3) monitor the brushless motor rotor position sensors. Each sensor signal transition is digitally detected, OR'ed at the Latch 'Set' Input, and causes C_T to discharge. A corresponding output pulse is generated at fout (Pin 5) of a defined amplitude, and programmable width determined by the values selected for R_T and C_T (Pin 6). The average voltage of the output pulse train increases with motor speed. When fed through a low pass filter or integrator, a DC voltage proportional to speed is generated. Figure 2 shows the proper connections for a typical closed loop application using the LD33035 brushless motor controller. Constant speed operation down to 100 RPM is possible with economical three phase four pole motors.

The ϕ_A inverter output (Pin 4) is used in systems where the controller and motor sensor phasing conventions are not compatible. A method of converting from either convention to the other is shown in Figure 3. For a more detailed explanation of this subject, refer to the text above Figure 39 on the LD33035 data sheet.

The output pulse amplitude V_{OH} is constant with temperature and controlled by the supply voltage on V_{CC} (Pin 8). Operation down to 5.5 V is guaranteed over temperature. For systems without a regulated power supply, an internal 8.25 V shunt regulator is provided.



®

DHA®

QJ/DHA 01.160-2019

LD33039

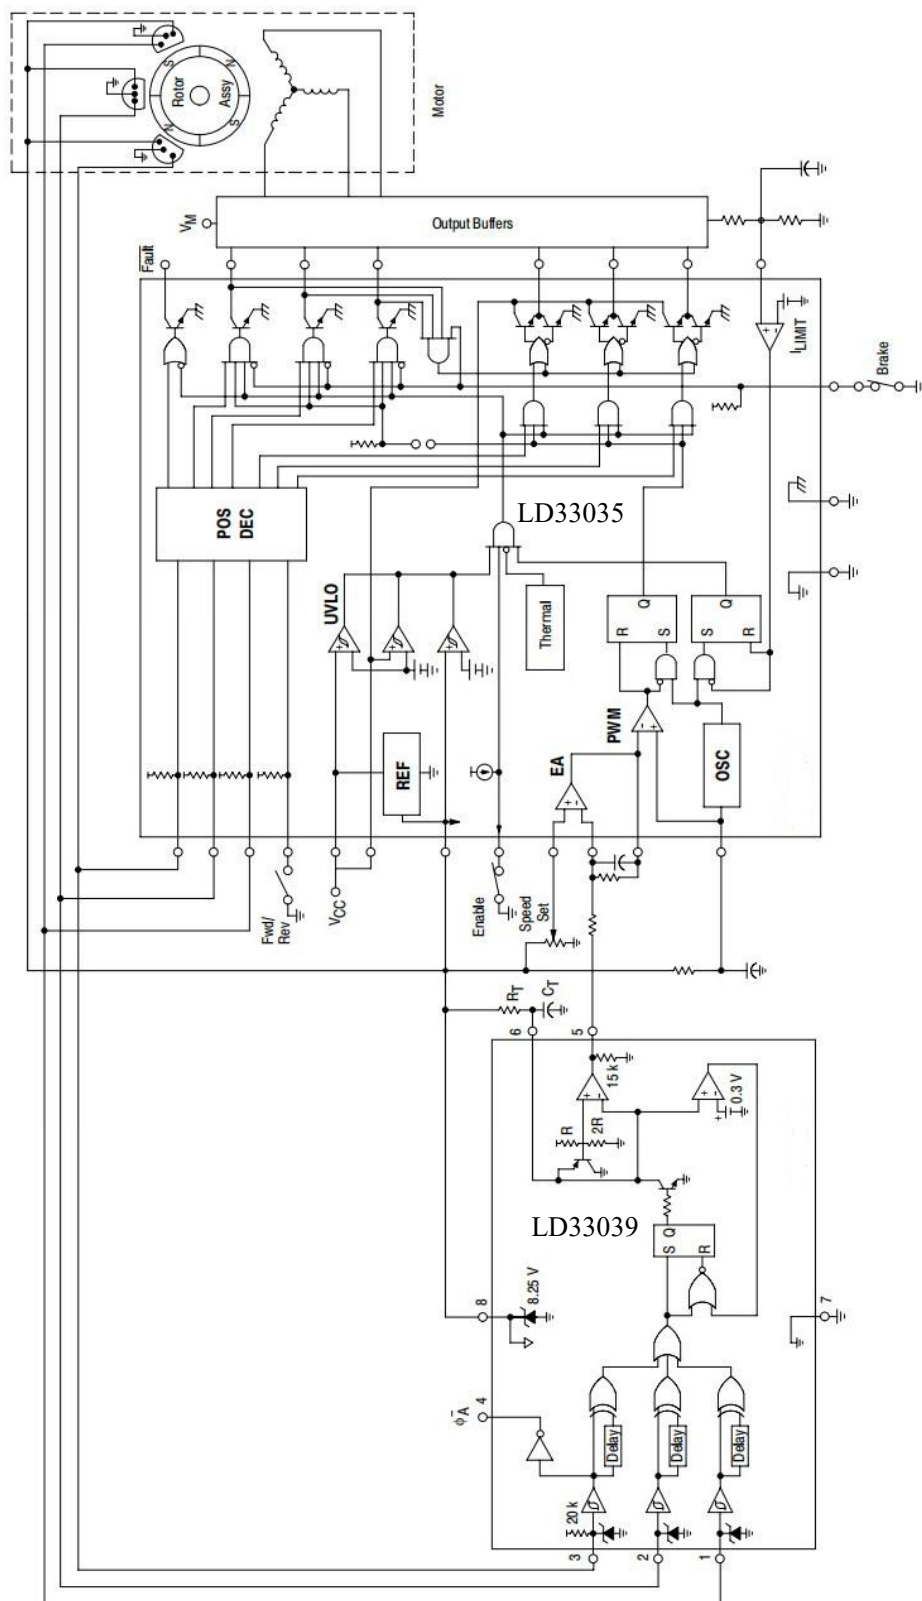


Figure 2. Typical Closed Loop Speed Control Application



®

DHA®

QJ/DHA 01.160-2019

LD33039

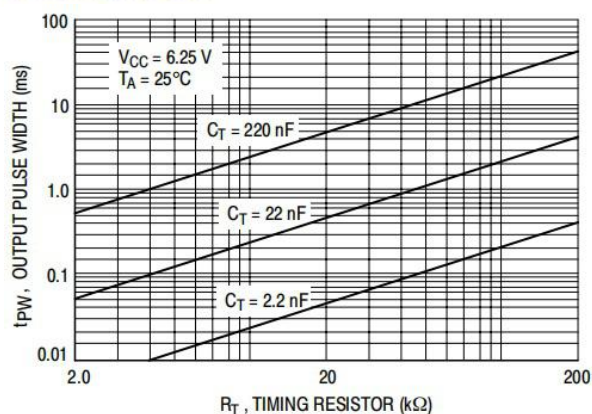


Figure 3. f_{out} , Pulse Width versus Timing Resistor

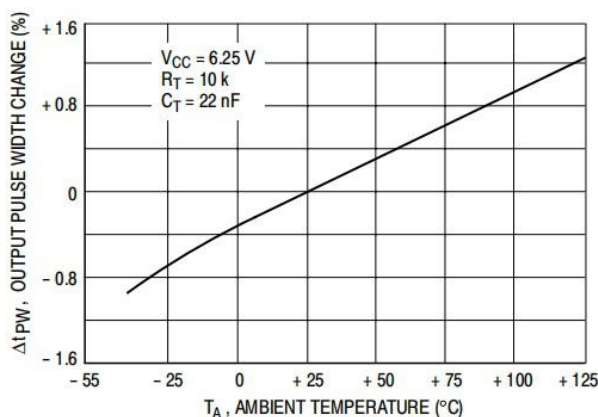


Figure 4. f_{out} , Pulse Width Change versus Temperature

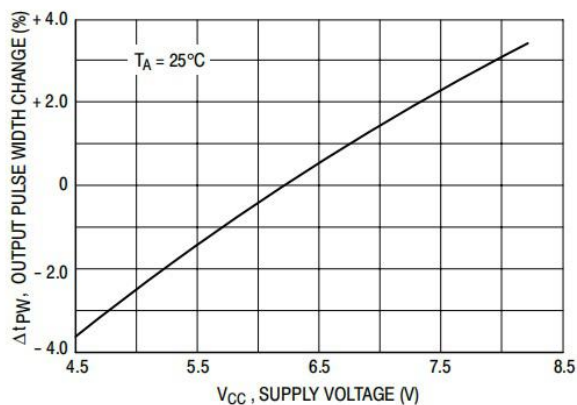


Figure 5. f_{out} , Pulse Width Change versus Supply Voltage

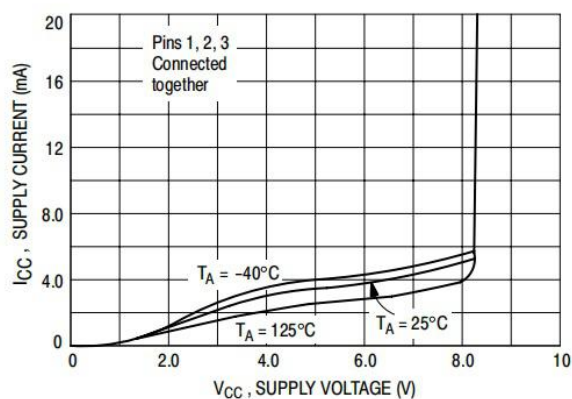


Figure 6. Supply Current versus Supply Voltage

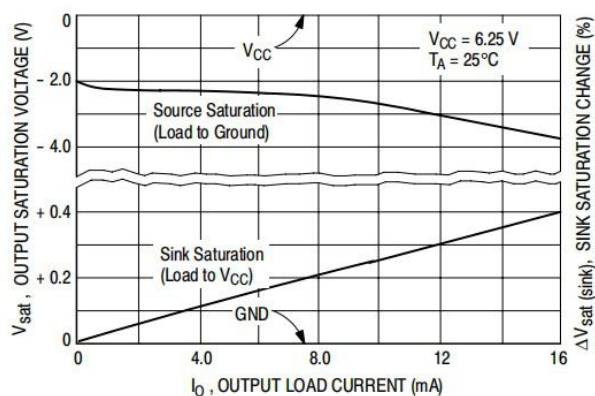


Figure 7. f_{out} , Saturation versus Load Current

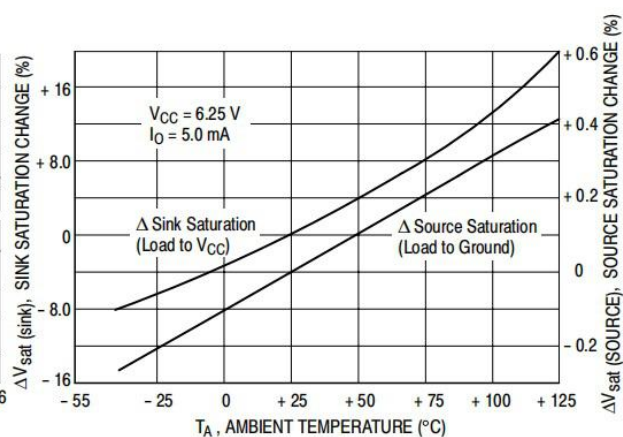


Figure 8. f_{out} , Saturation Change versus Temperature



®

DHA®


QJ/DHA 01.160-2019

LD33039

Package Information

DIP8

Dimensions in mm

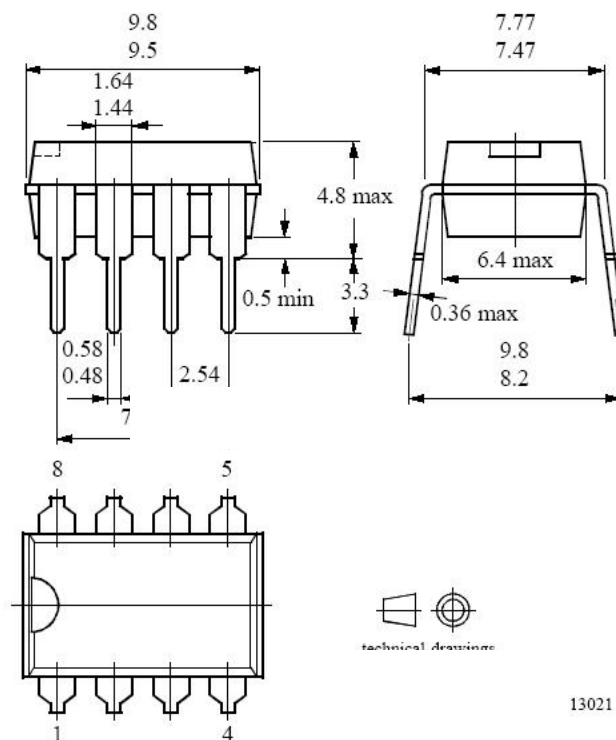

SOP8

Dimensions in mm

